








DEMAG
POWER GENERATOR

DMG-Pseries

diesel generator set

Perkins®

Standby	Prime
2500 kVA	2250 kVA
2000 kW	1800 kW

-  Cabinet / Uncabinet
-  Diesel
-  Water Cooling
-  50 Hz / 60 Hz
-  3 Phase - 230/400 V



Standby Power (ESP): : In case of failure of reliable mains supply, variable electricity is used to power the load. ESP complies with ISO8528. Overloading is not allowed.

Prime Power (PRP): : Variable electricity to load, power supply, yearly unlimited operation used for the clock. PRP complies with ISO 8528. 12 hours of operation according to ISO3046 Used for 10% overload for 1 hour in the period.

Engine

In DEMAG Generator engine products; High performance, low fuel consumption, mechanical or electronic governor depending on the type, Oil, air, fuel filters are interchangeable, using high technology engine brands in accordance with ISO 3046, ISO 8528, BS 5514, DIN 6271 standards.

Engine Specifications

Engine Brand	PERKINS	
Engine Model	4016-61TRG3	
Engine Power	2083 kW / 1875 kW (Standby/Prime)	
Speed (rpm)	1500	
Time	4	
Number of Cylinders	16 V Type	
Engine Capacity	61,123 lt	
Bore & Stroke (mm x mm)	160x190	
Compression Ratio	13,6:1	
Governor Type	Electronic	
Induction System	Turbocharge / Intercooler	
Combustion System	Direct	
Cooling System	Water Cooling	
Lubrication System	237 lt	
Coolant Capacity	270 lt	
Fuel Consumption	%100	470 lt
	%75	344 lt
	%50	234 lt

Alternator

In DEMAG Generator alternator products, it has a steel body design, robust structure, maintenance-free bearing system (brushless) with self-excitation system, electronic type voltage regulator, BS 4999-5000; CEI EN 60034-1; IEC 60034-1; VDE 0530, OVE M10, NF 51-100, 111; It uses high technology alternator brands in accordance with NEMA MG 122.

Alternator Features

Power Factor	0,8
Insulation	H
Protection	IP21-IP23
Output Voltage	231/400 VAC - 50Hz
Frequency	50 Hz
Connection Type	Star
Design	4 Poles - Brushless

Control System

Easy-to-use secure software updates in **DEMAG Generator** control panels have a structure that can be easily done with USB ports. Optionally, remote control can be provided with ETHERNET and GPRS. Panel body is made of steel sheet and is painted with electrostatic powder paint. It has been painted. The electronics are isolated and waterproof design.

Control System Features

LCD Screen Automatic Control System

Remote Monitoring System

Multifunctional Business Opportunity

Multi Language Support

Programmable over USB, RS-232 and GSM



Chassis, Canopy and Fuel Tanks

DEMAG Generator chassis has a modular design and is made of steel. Engine alternator Radiator connections are made with vibration wedges and vibration is minimized. Special chassis and fuel tank in line with customer demands can make designs.

Canopy

Canopy design that facilities generator maintenance

Emergency stop button on the cabin

Transparent control cabinet window


Acoustic sponge providing sound insulation

Hidden exhaust silencer inside the cabin

Engine cooling air ducts

Electrostatic powder paint resistant to corrosion and rusting

Refueling outside the cabin

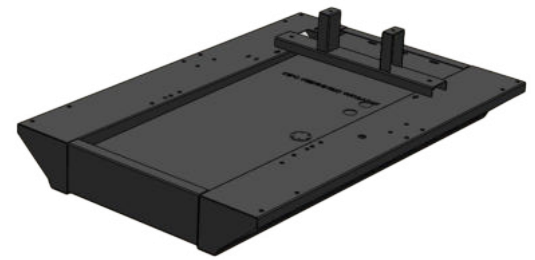

Options

Transfer Board

Protection Switch

External Type Fuel Tank

Synchronous System

Electronic Governor Application

Earthquake Sensor

Analog Gauges

24 Hour Fuel Tank

Special Chassis Color

Special Cabinet Color

Remote Monitoring Module

Special Type Muffler

Quality Standards

All generating sets produced by **DEMAG Generator** have TSE, CE and ISO 9001 certificates.

Technical information and values are in accordance with ISO8528, ISO3046, NEMA MG1.22, IEC 600341, BS 49995000, VDE 0530 standards.

Technical Dimensions

Cabinet Group

Width	Length	Height	Weight	Fuel Tank
2550 mm	9000 mm	4580 mm	22200 kg	4000 lt

Uncabinet Group

Width	Length	Height	Weight	Fuel Tank
2240 mm	5850 mm	2900 mm	20094 kg	4000 lt

